


17PL

SPECIFICATIONS

DIMENSION "L"
Single Stage (3:1 to 10:1) = 2.869± .015
Double Stage (16:1 to 100:1) = 3.738 ± .015

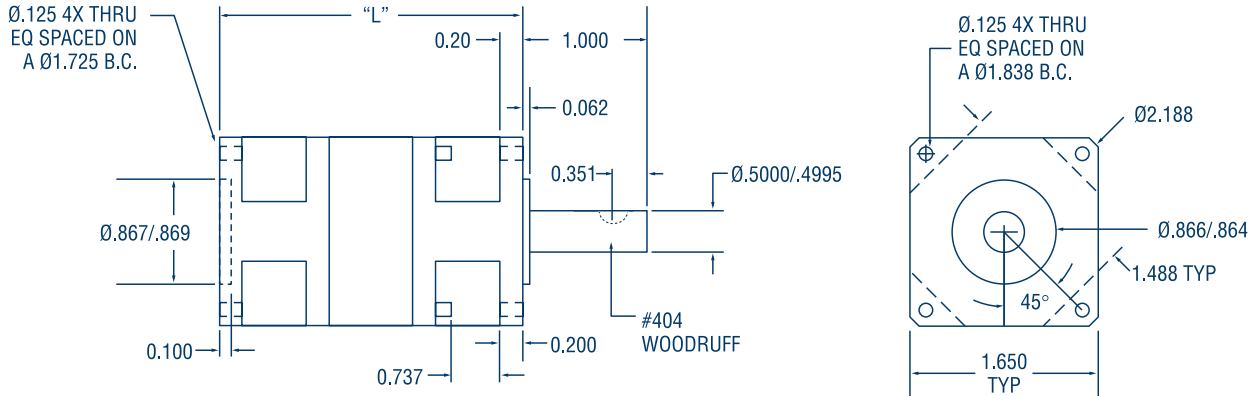

SINGLE STAGE

DOUBLE STAGE

Part #	Ratio	Continuous output torque at 1500 rpm input (in-lbs)	Continuous output torque at 3500 rpm input (in-lbs)	Continuous output torque at 5000 rpm input (in-lbs)	Gearhead inertia at input (lb-in-sec ²)
17PL003	3:1	243	169	137	3.25 x 10 ⁻⁵
17PL004	4:1	220	166	140	1.60 x 10 ⁻⁵
17PL005	5.5:1	197	159	139	1.10 x 10 ⁻⁵
17PL007	7:1	180	151	135	9.56 x 10 ⁻⁶
17PL010	10:1	143	126	116	8.36 x 10 ⁻⁶
17PL016	16:1	304	276	259	1.59 x 10 ⁻⁵
17PL022	22:1	311	289	275	1.10 x 10 ⁻⁵
17PL028	28:1	394	296	285	9.54 x 10 ⁻⁶
17PL040	40:1	319	306	296	8.35 x 10 ⁻⁶
17PL049	49:1	230	224	219	9.44 x 10 ⁻⁶
17PL055	55:1	264	256	251	8.31 x 10 ⁻⁶
17PL070	70:1	231	226	224	8.30 x 10 ⁻⁶
17PL100	100:1	176	174	173	8.29 x 10 ⁻⁶

GENERAL SPECIFICATIONS

Construction Type	Ratio	Backlash: Standard (arc-minutes)	Backlash: Low Backlash (arc-minutes)	Efficiency	Weight (lbs)	Maximum Tested Input rpm
Single Stage	3:1 to 10:1	6	3	90%	1.00	5000
Double Stage	16:1 to 100:1	10	7	85%	1.60	5000




PEAK TORQUE: 15% above continuous rating.

NOTE: Repeated peak torque loading may cause failure.



17PL

BEARING LIFE VS SHAFT LOAD

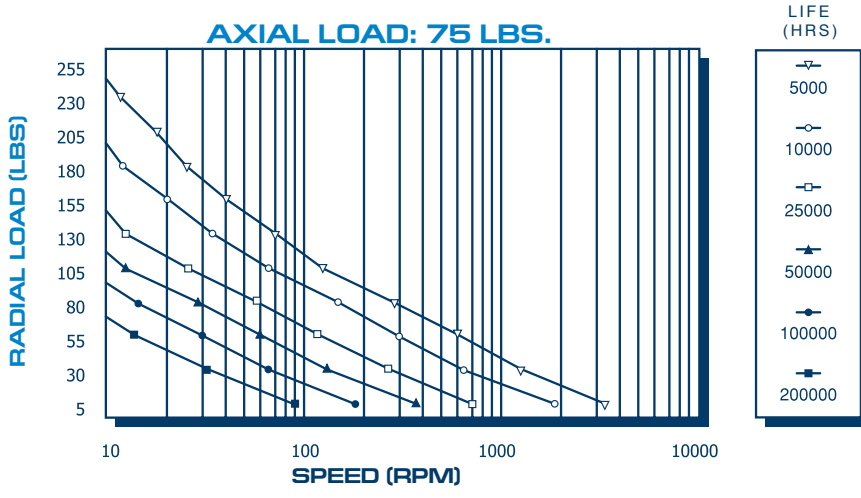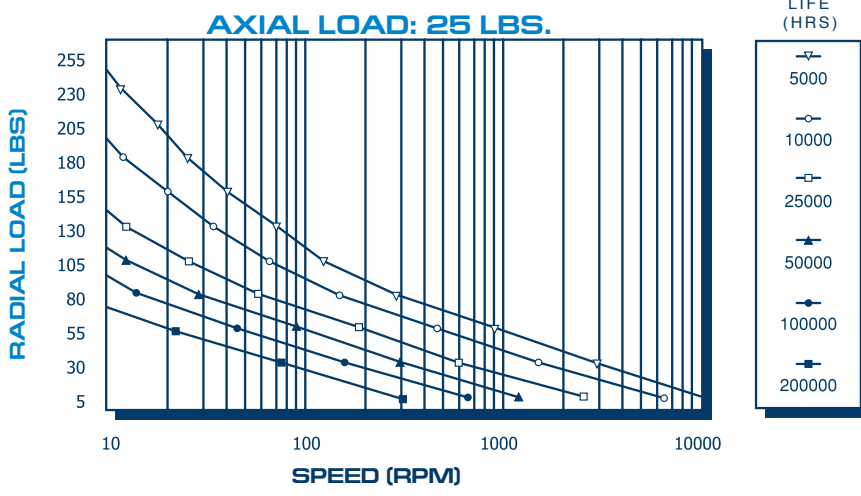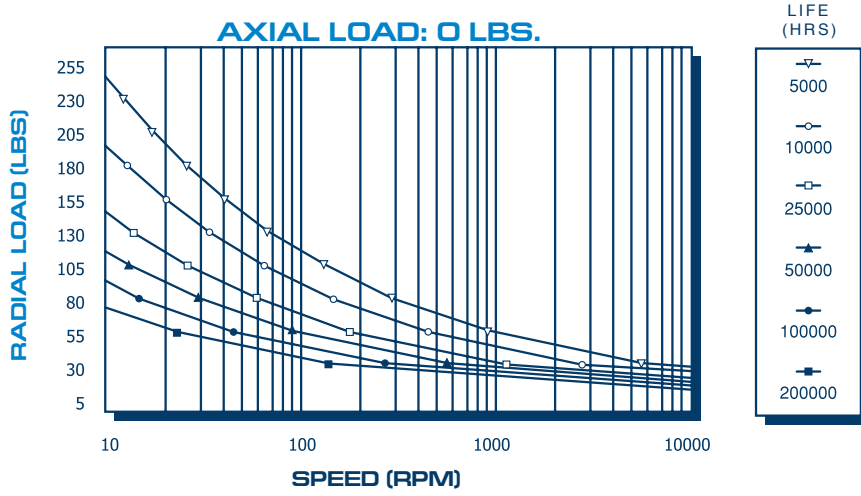

SPEED (RPM)

Refers to the gearheads output shaft speed.

LIFE (HRS)

of lifetime revolutions ÷ (60 x rpm)

F^{RADIAL}

Calculated at 1/2 the shaft length.

